

streaming table

SPECS GUIDE



**HIGH TABLE
WITH CASTERS**

Metal structure
Melamine components
TV Support
Rear vertical tray



ACCESSORIES

Trapezoidal basket
Cable tray
Power unit and
charging station
Socket strip




DOCUMENTATION



ECODESIGN

HIGH TABLE WITH CASTERS:

METAL STRUCTURE:

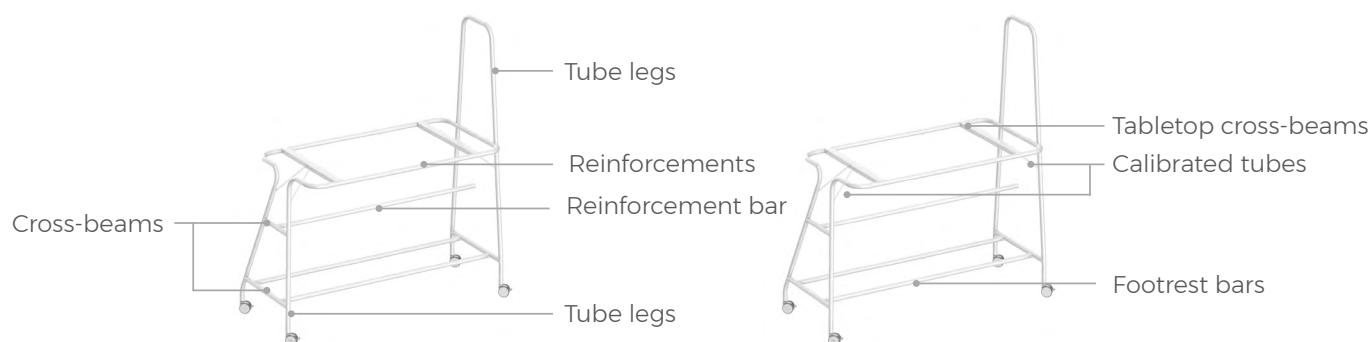

V-shape frame of steel cold laminated that consist in tube legs, cross-beams and calibrated tubes. Curved **tube legs** $\varnothing 30 \times 2$ mm welded and embedded to the rest of the structure with MIG-system.

Tabletop cross-beams of $50 \times 30 \times 2$ mm.

Cross-beams of $\varnothing 30 \times 2$ mm.

For added stability, include **four calibrated** tubes of $\varnothing 8$ mm between the top crossbar and the cross-beams welded with MIG system.

Reinforcements to fix both sides of $\varnothing 30 \times 2$ mm embedded to the structure.

Reinforcement and footrest bars of $\varnothing 30 \times 2$ mm. The assembly to the structure is with DIN 7991 M6x25 screws.

FINISHES:



White
RAL 9016



Silver
RAL 9006



Graphite
RAL 7022



Black
RAL 9005

CASTERS:

4 casters with brake of $\varnothing 75$ mm and a pin of $\varnothing 8$ mm.



For white structure: white casters with gray stain-resistant soft treads.



For black or graphite structure: black casters with black soft treads.



For other finishes: silver casters with gray soft treads.



The casters are attached to the structure with an M8 threaded steel bolt and a connecting shaft of $\varnothing 10$ mm

HIGH TABLE WITH CASTERS:

DESKTOPS:

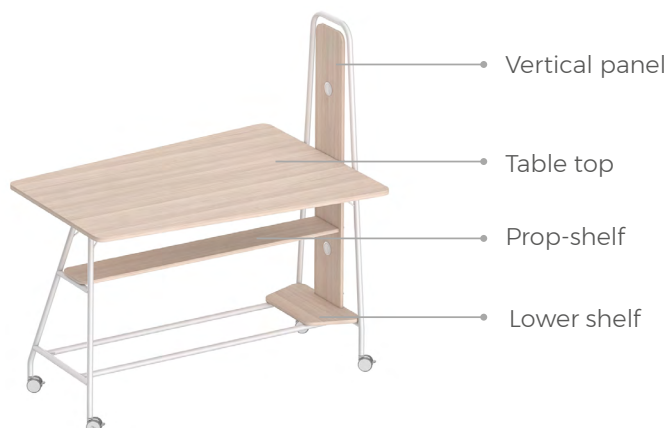


Table top and prop-shelf : 25 mm of thickness. Recoated chipboard with melamine of 120 grs/m² in both faces with a density of 630 Kg/m³ ± 5 %.

ABS edges all around the top with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.



Vertical panel and lower shelf : 19 mm of thickness. Recoated chipboard with melamine of 120 grs/m² in both faces with a density of 630 Kg/m³ ± 5 %.

ABS edges all around the top with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.

5 cm round edges.



Black



Beech



Light acacia



Graphite



Maple



Dark acacia



White



Pear



Oak



Grey



Wengue



Dark oak




Melamine components are fixed to the frame of the desk with black-zinc DIN 7991 M6 x 16 screws.



Vertical panel is assembled to the table structure with threaded bolts, eccentric and DIN 7991 M6 x 16 screws.

HIGH TABLE WITH CASTERS:

TV SUPPORT:

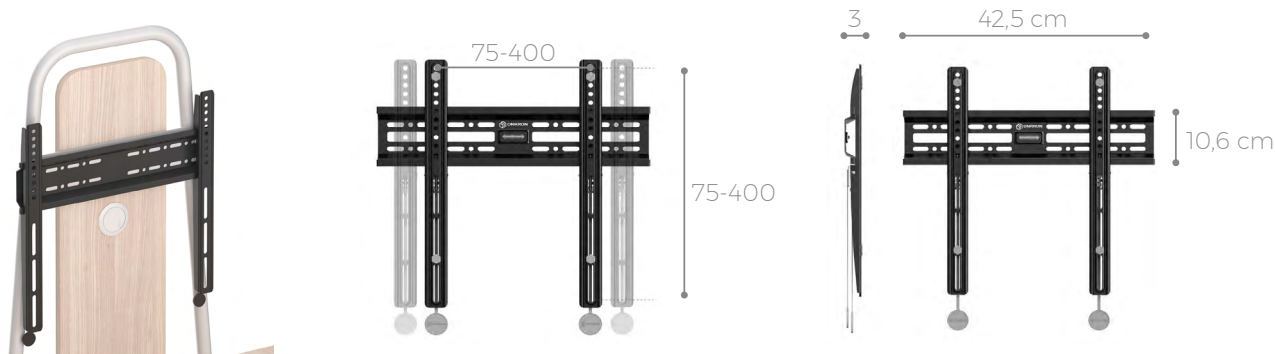

Support of cold rolled steel sheet 1,5 mm hat consist in a steel-plate of 406 x 36 mm and two metal drilled supports of 350 x 54 mm.

Finish: black epoxy paint (RAL 9005).



Suitable for VESA standards from 75x75 to 400x400 mm.



Mounting of flat screens up to 23 Kg.



For screens up to 43 inches.



Wall distance: 30 mm.



It is mounted to the vertical panel with 8 screws M6x20.

REAR VERTICAL TRAY:



Recycled PET panel. Density 0,6 (kg/m²)^{±10} and 3 mm thick.

Manufactured through digital cutting and folded.

It is mounted to the vertical panel with screws DIN 7991 M6x12.



Light grey



Dark grey



Graphite



Black



Beige




Brown

ACCESSORIES:

TRAPEZOIDAL BASKET:


Recycled PET panel. Density 2,40 (kg/m²)^{±10} and 8 mm thick.

Manufactured through digital cutting, folding, and stuck with melted glue.



Fastening to the lower shelf using wood screws.

FINISHES:


Light grey



Dark grey



Graphite



Black



Beige



Brown

CABLE TRAY:


Recycled PET panel. Density 2,40 (kg/m²)^{±10} and 8 mm thick.

Manufactured through digital cutting and folded.



Fastening underneath the tabletop using DIN 7991 M6x12 screws and metal brackets made of cold rolled steel sheet of 2 mm in the same finish as the structure.

FINISHES:


Light grey



Dark grey



Graphite



Black



Beige



Brown

ACCESSORIES:

POWER UNIT and CHARGING STATION:



Portable power unit with a standard connection system for all types of electronic devices in offices.
It consists of:

- One socket
- Two USB-C charger
- Two USB-A charger
- Rapid charging in max. 3 hours
- Soft-start and automatic standby (energy-saving mode)
- Safety requirements as certified by the VDE (IEC).

Portable power unit:

Input	24 V CC; 5 A
1 socket CEE7/3	230 V CA, 50 Hz, 150 W
2 chargers USB-C	5 / 9 / 15 / 20 V DC
2 chargers USB-A	5 V DC
Energy output (max.)	220 W / 230 Wh
Weight	3,1 kg



Charging station:

Input	100-240 V CA - 50/60 Hz
Output	24 V CC 5A
Weight	220 g



A 75W consumption has a duration of $\pm 4:30$ hours.

Do not reach the total battery usage limit: it is recommended to charge when it is at 10% or when the last LED is displayed.

It is advisable to unplug it once the battery is fully charged.

The battery capacity decreases after 1,000 charge cycles.

ACCESSORIES:

DESKTOP CABLE MANAGEMENT:




TYPE A: box with 3 sockets + 2 data.

- In one side of the kit there is a black fast male connector with 3 poles fixed with pressure. In the other side, there is a black fast female connector with 3 poles fixed with pressure also.
- Three black sockets of 45x45.
- Two RJ45 (CAT6) connectors with dust caps and 1 m of cable each one.
- One black connection cable for sockets of 2 meters.
- Cable management can be terminal or add-on. The total of electric connections should not exceed 16 ampere power. Do not connect more than 3 kits. (1 terminal + 2 add-ons maximum).




- Also available with charging USB or HDMI
- Available finishes: silver, white, graphite or black.



TYPE B: box with 4 sockets.

- In one side of the kit there is a black fast male connector with 3 poles fixed with pressure. In the other side, there is a black fast female connector with 3 poles fixed with pressure also.
- Four black sockets of 45x45.
- One black connection cable for sockets of 2 meters.
- Cable management can be terminal or add-on. The total of electric connections should not exceed 16 ampere power. Do not connect more than 3 kits. (1 terminal + 2 add-ons maximum).
- Also available with charging USB or HDMI
- Available finishes: silver, white, graphite or black.



TYPE C: polypropylene box with frame and anodized aluminum cover.

There is a black brush in the large size of the cover for cables. Cover can be open 90° and allows user to reach the electrification tray under the desktop. Approximate size: 235 x 120 mm.

Available finishes: silver, white, graphite or black.



ACCESSORIES:

TRAY CABLE MANAGEMENT:

4 sockets.

- Anodized aluminum beam with U-shape, 2 black ABS covers joined to the beam with metal sheet screws.
- Four black sockets of 45x45.
- One black connection cable for sockets of 2 meters.



ES

DE



FR



US




UK

CARE INSTRUCTIONS



Clean the elements with a soft damp cloth and neutral detergent.

MEASUREMENTS (cm)

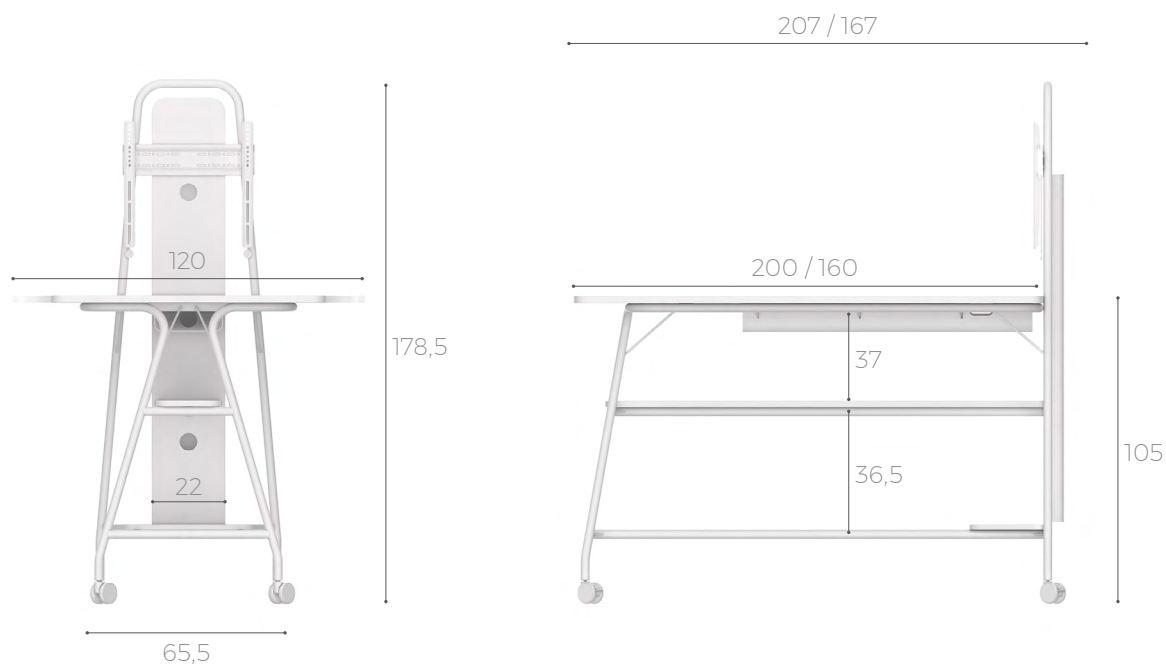

This unit is delivered **DISASSEMBLED**.

RECYCLABILITY and TOXIC MATERIALS

This furniture does not contain any toxic material and its components are recyclable.



For more information, please contact export department.