

## streaming trolley

## SPECS GUIDE



### TROLLEYS

- Types
- Metal structure
- Melamine components
- TV Support
- Upper door
- Low cabinet
- Rear vertical tray



### ACCESSORIES

- Pouf
- Side table
- Basket
- Power unit and charging station



### DOCUMENTATION



### ECODESIGN

---

**TROLLEYS:**

---

**TYPES:**

**STREAMING TROLLEY - WITHOUT LOW CABINET:**




**STREAMING TROLLEY - WITH LOW CABINET:**



## TROLLEYS:


### METAL STRUCTURE:

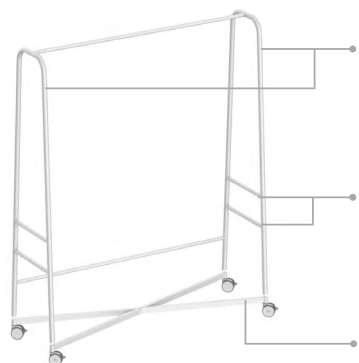

'U' shape **sides** made from cold-rolled steel curved tube of Ø30 x 2 mm, laser cut and machined.

They include two **crosstubs** made of cold-rolled steel tube of Ø22 x 2 mm, joined by fitting and welded using MIG system.

'U' shape **lower structure** made of cold-rolled steel tube of 30 x 20 x 1,5 mm laser-cut and machined.



**Round tubes** manufactured in cold-rolled steel tube of Ø30 x 2 mm.

A plate with a 3 mm thick thread is welded at each end.

They are used to prevent the falling of objects and enhance the stability of the assembly.

The round tube is assembled to the metal side using M4x35 DIN 7380 screws.



Round tubes of Ø30 x 2 mm are welded at each end where black polyamide **plugs** with an M8 metal nut are placed.

### FINISHES:



White  
RAL 9016



Silver  
RAL 9006



Graphite  
RAL 7022



Black  
RAL 9005

### CASTERS:

4 casters with brake of Ø75 mm and a pin of Ø8 mm.



**For the trolley with white structure:** white casters with gray stain-resistant soft treads.



**For the trolley with black or graphite structure:** black casters with black soft treads.




**For other finishes:** silver casters with gray soft treads.



The casters are attached to the trolley with an M8 threaded steel bolt and a connecting shaft of Ø10 mm

## TROLLEYS:

### MELAMINE COMPONENTS:

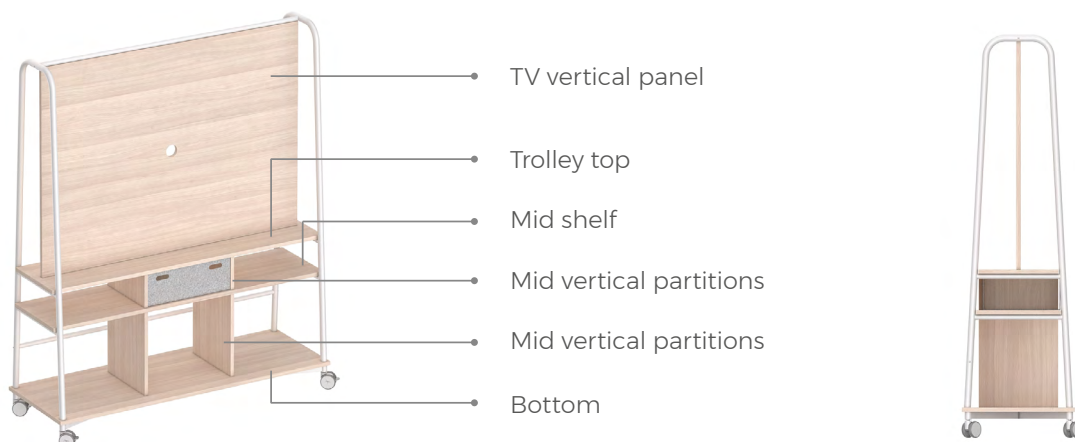

**Lectern top, bottom, mid vertical partitions, mid-shelf and TV vertical panel:** 19 mm of thickness. Recoated chipboard with melamine of 120 grs/m<sup>2</sup> in both faces with a density of 630 Kg/m<sup>3</sup> ± 5 %.

ABS edges all around the top with a bevel of 2 and 0,8 mm. Edges are fixed with melted glue and rounded in shape.



Are assembled to the metal structure using dowels, M6 bolts, and eccentric fasteners.



The bottom is attached to the metal sides with allen screws M8x35.

### FINISHES:



Black



Beech



Light acacia



Graphite



Maple



Dark acacia



White



Pear



Oak



Grey



Wengue



Dark oak



Silver

## TV SUPPORT:



Support of cold rolled steel sheet 1,5 mm hat consist in a steel-plate of 400 x 160 mm and two metal drilled supports of 350 x 54 mm.

Finish: black epoxy paint (RAL 9005).



Suitable for VESA standards from 75x75 to 600x400 mm.



Mounting of flat screens up to 36 Kg.




For screens up to 55 inches.



Wall distance: 29 mm.



It is mounted to the vertical panel with 8 screws M6x20.

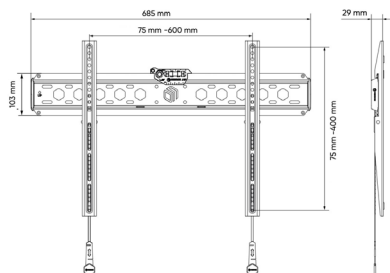



## UPPER DOOR:



**Upper door:** recycled PET panel. Density 0,6 (kg/m<sup>2</sup>)<sup>±10</sup> and 3 mm thick.  
Manufactured through digital cutting and folded.



90° swinging door.



Slotted back as ventilation.



The door is screwed to the trolley gap.

## FINISHES:



Light grey



Dark grey



Graphite



Black



Beige



Brown

## LOW CABINET:

**Low door:** 19 mm of thickness. Recoated chipboard with melamine of 120 grs/m<sup>2</sup> in both faces with a density of 630 Kg/m<sup>3</sup> ± 5 %.

ABS edges all around the top with a bevel of 2 and 0,8 mm. Edges are fixed with melted glue and rounded in shape.



Black



Graphite



White



Grey



Silver



Beech



Maple



Pear



Wengue



Light acacia



Dark acacia



Oak



Dark oak



**DOOR:** 110° hinge with silicone door-protections (stoppers).

The door includes a cylinder (replaceable in case of breakage) with a chrome hook locking system with the possibility of master key or same keys.

**TOW KEYS:** black articulated and anti-breakage hinged keys.



**ZAMAK-KNOB** finish in black epoxy matte paint.

Size: 15 x 15 x 25 mm

Can be assembled with a M4 screw and a Ø5 mm hole.



**BACK PANEL** made of cold rolled steel sheet 1,2 mm DC01.

Slotted for ventilation.

It is fixed to the mid-vertical partitions using euro screws.



White  
RAL 9016



Silver  
RAL 9006



Graphite  
RAL 7022



Black  
RAL 9005

## REAR VERTICAL TRAY:



**Rear vertical tray:** recycled PET panel. Density  $0,6 \text{ (kg/m}^2\text{)}^{\pm 10}$  and 3 mm thick.  
Manufactured through digital cutting and folded.



It is mounted to the vertical panel with screws DIN 7991 M6x12.

### FINISHES:



Light grey



Dark grey



Graphite



Black



Beige




Brown



## ACCESSORIES:

### PUFF:

**Foam** is composed of 2 foam layers of flexible polyurethane (polyether) of different densities:

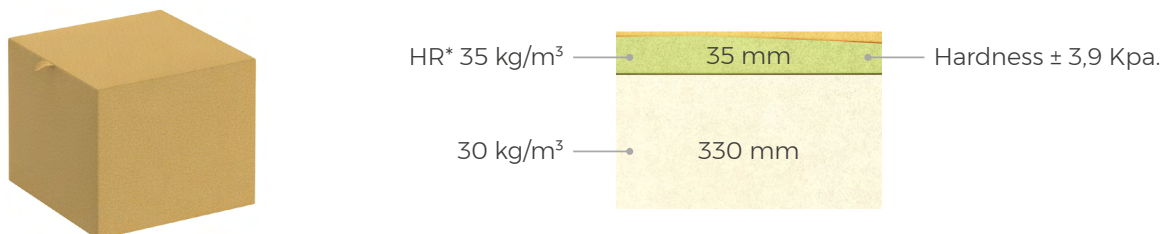

\* HR= *High Resiliency, non-deform and high recovery.*




Puff is covered with **wadding** (100 gr.)




**Open seam:** for vertical corners.

**Felled seam:** for the upper perimeter.

All the fabrics of the fabric folder are available except EVOLVE.



Open seam



Felled seam




A 3 mm thick medium-density fiberboard (MDF) is glued at the bottom of the puff.

White ABS cylindrical sliding stoppers are screwed on this board.



They can only be placed inside the **lower gaps** of the trolley.

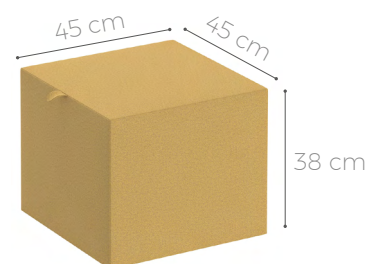

## ACCESSORIES:

### SIDE TABLE:



**Melamine tabletop:** Manufactured with 19 mm thick particleboard coated on both sides with a 120g/m<sup>2</sup> melamine finish, and a density of 630 ± 5kg/m<sup>3</sup>.

The edges are 2 mm thick ABS fixed with melted glue and rounded in shape.

5 cm round edges.



Black



Beech



Light acacia



Graphite



Maple



Dark acacia



White



Pear



Oak



Grey



Wengue



Dark oak



Tops are fixed to the frame of the desk with black-zinc DIN 7991 M6 x 25 screws.

Structure has 4 fixing drillings for the top.

**Structure** manufactured in cold-folder-rolled steel tube of Ø15 and 1,5 mm thickness.

Black polypropylene glides to protect frame and floor from scratching.



White  
RAL 9016



Silver  
RAL 9006



Graphite  
RAL 7022



Black  
RAL 9005



They can only be placed inside the **lower gaps** of the trolley.




## ACCESSORIES:

## BASKET:



Recycled PET panel. Density 2,40 (kg/m<sup>2</sup>)<sup>±10</sup> and 8 mm thick.

Manufactured through digital cutting, folding, and stuck with melted glue.

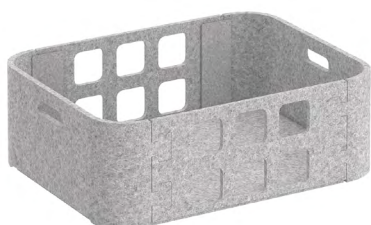

## FINISHES:



Light grey



Dark grey



Graphite



Black



Beige



Brown



They are placed inside trolley gaps.



## ACCESSORIES:

### POWER UNIT and CHARGING STATION:



Portable power unit with a standard connection system for all types of electronic devices in offices. It consists of:

- One socket
- Two USB-C charger
- Two USB-A charger
- Rapid charging in max. 3 hours
- Soft-start and automatic standby (energy-saving mode)
- Safety requirements as certified by the VDE (IEC).

#### Portable power unit:

Input	24 V CC; 5 A
1 socket CEE7/3	230 V CA, 50 Hz, 150 W
2 chargers USB-C	5 / 9 / 15 / 20 V DC
2 chargers USB-A	5 V DC
Energy output (max.)	220 W / 230 Wh
Weight	3,1 kg



#### Charging station:

Input	100-240 V CA - 50/60 Hz
Output	24 V CC 5A
Weight	220 g



A 75W consumption has a duration of  $\pm 4:30$  hours.

Do not reach the total battery usage limit: it is recommended to charge when it is at 10% or when the last LED is displayed.

It is advisable to unplug it once the battery is fully charged.


The battery capacity decreases after 1,000 charge cycles.

## CARE INSTRUCTIONS






Clean the elements with a soft damp cloth and neutral detergent.

## MEASUREMENTS (cm)

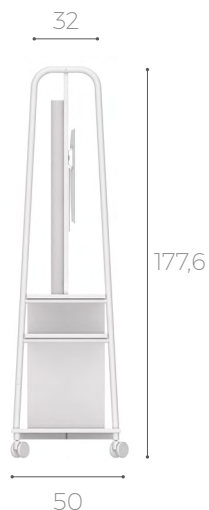

## INTERIOR MEASUREMENTS:

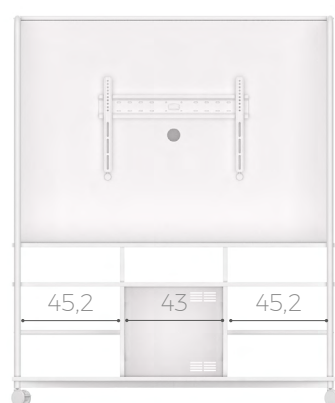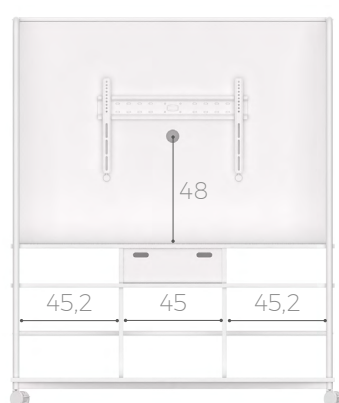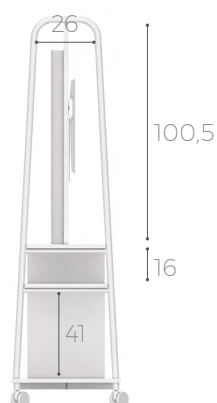

This unit is delivered **DISASSEMBLED**.

---

## RECYCLABILITY and TOXIC MATERIALS

This furniture does not contain any toxic material and its components are recyclable.



For more information, please contact export department.