



SELF-STANDING PANEL WITH CASTERS

Types

Metal structure

Melamine components

Whiteboard

TV Support

Cable tray



ACCESSORIES

Large basket

Power unit and
charging station

Socket strip



DOCUMENTATION



ECODESIGN

SELF-STANDING PANEL WITH CASTERS:

TYPES:

WALL - BOARD:



WALL - MONITOR:




WALL - MONITOR + BOARD:



SELF-STANDING PANEL WITH CASTERS:

METAL STRUCTURE:

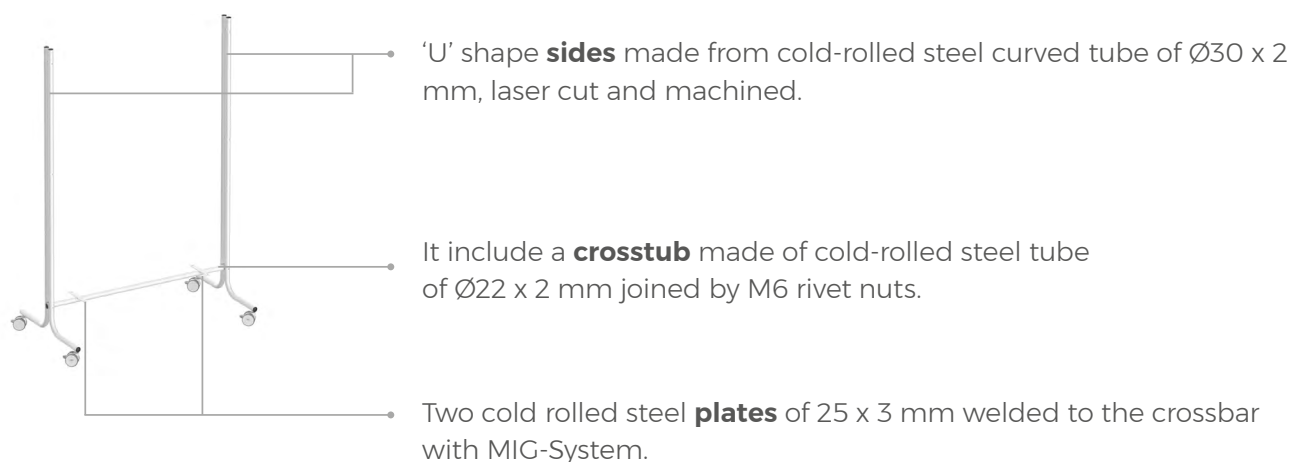

FINISHES:



White
RAL 9016



Silver
RAL 9006



Graphite
RAL 7022



Black
RAL 9005

CASTERS:

4 casters with brake of Ø75 mm and a pin of Ø8 mm.

Caster load capacity:

- 60 kg in motion.
- 140 kg static.



For white structure: white casters with gray stain-resistant soft treads.



For black or graphite structure: black casters with black soft treads.




For other finishes: silver casters with gray soft treads.



The casters are attached to the structure with an M8 threaded steel bolt and a connecting shaft of Ø10 mm

SELF-STANDING PANEL WITH CASTERS:

MELAMINE COMPONENTS:

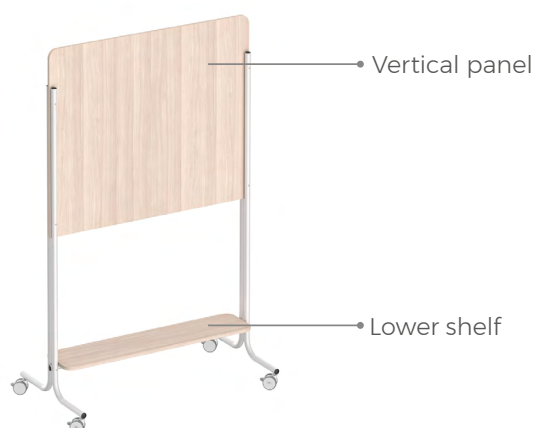

19 mm of thickness. Recoated chipboard with melamine of 120 grs/m² in both faces with a density of 630 Kg/m³ ± 5 %.

ABS edges all around the top with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.

5 cm round edges.



The vertical panel has M6 metal inserts and it is screwed to the structure with M6x35 DIN 7380 screws.



The lower shelf has M6 metal inserts on one face for attachment with the metal plates of the structure.

FINISHES:



Black



Beech



Light acacia



Graphite



Maple



Dark acacia



White



Pear



Oak



Grey



Wengue



Dark oak



Silver

SELF-STANDING PANEL WITH CASTERS:

WHITEBOARD:



It is composed of two panels:

- A panel **at the back**: made of cold-rolled steel sheet, 0,8 mm thick, painted with white epoxy paint (RAL 9016).
- A panel **at the front**: whiteboard that is magnetically attached to the metallic back panel.




The back is screwed to the vertical melamine panel using 2 wood screws.



Suitable for magnets and marker writing, dry-erase.

SELF-STANDING PANEL WITH CASTERS:

TV SUPPORT:

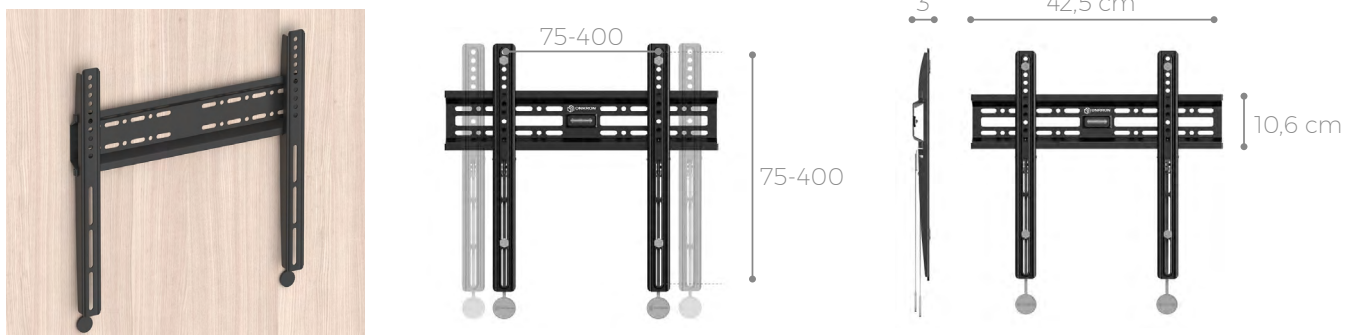

Support of cold rolled steel sheet 1,5 mm hat consist in a steel-plate of 406 x 36 mm and two metal drilled supports of 350 x 54 mm.

Finish: black epoxy paint (RAL 9005).



Suitable for VESA standards from 75x75 to 400x400 mm.



Mounting of flat screens up to 23 Kg.



For screens up to 43 inches.



Wall distance: 30 mm.



It is mounted to the vertical panel with 8 screws M6x20.

CABLE TRAY:



Cold folded steel sheet of 0,8 mm quality DC01 painted with black epoxy paint (RAL 9006).
Die cut to fix electric kits.



Fastening to the vertical panel using M6 threaded knobs to adjust to the desired height.


ACCESSORIES:

LARGE BASKET:



Recycled PET panel. Density 2,40 (kg/m²)^{±10} and 8 mm thick.

Manufactured through digital cutting, folding, and stuck with melted glue.

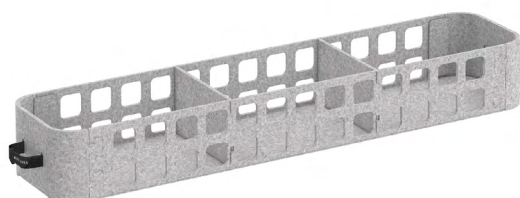

FINISHES:



Light grey



Dark grey



Graphite



Black




Beige



Brown



They are placed on the lower shelf and secured to the structure with 2 Velcro straps.

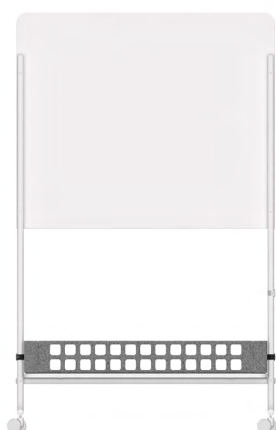

ACCESSORIES:

POWER UNIT and CHARGING STATION:



Portable power unit with a standard connection system for all types of electronic devices in offices. It consists of:

- One socket
- Two USB-C charger
- Two USB-A charger
- Rapid charging in max. 3 hours
- Soft-start and automatic standby (energy-saving mode)
- Safety requirements as certified by the VDE (IEC).

Portable power unit:

Input	24 V CC; 5 A
1 socket CEE7/3	230 V CA, 50 Hz, 150 W
2 chargers USB-C	5 / 9 / 15 / 20 V DC
2 chargers USB-A	5 V DC
Energy output (max.)	220 W / 230 Wh
Weight	3,1 kg



Charging station:

Input	100-240 V CA - 50/60 Hz
Output	24 V CC 5A
Weight	220 g



A 75W consumption has a duration of $\pm 4:30$ hours.

Do not reach the total battery usage limit: it is recommended to charge when it is at 10% or when the last LED is displayed.

It is advisable to unplug it once the battery is fully charged.

The battery capacity decreases after 1,000 charge cycles.

ACCESSORIES:

TRAY CABLE MANAGEMENT:

4 sockets.

- Anodized aluminum beam with U-shape, 2 black ABS covers joined to the beam with metal sheet screws.
- Four black sockets of 45x45.
- One black connection cable for sockets of 2 meters.



ES DE



FR



US







UK

CARE INSTRUCTIONS



Clean the elements with a soft damp cloth and neutral detergent.

MEASUREMENTS (cm)

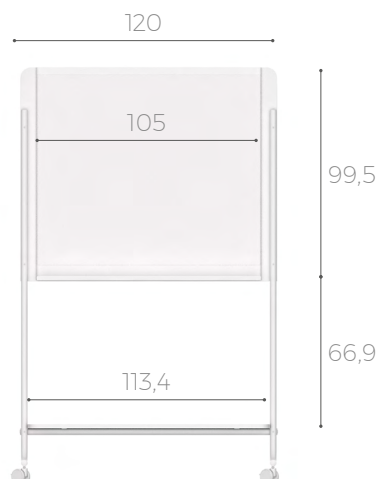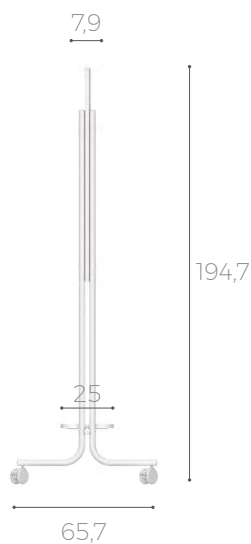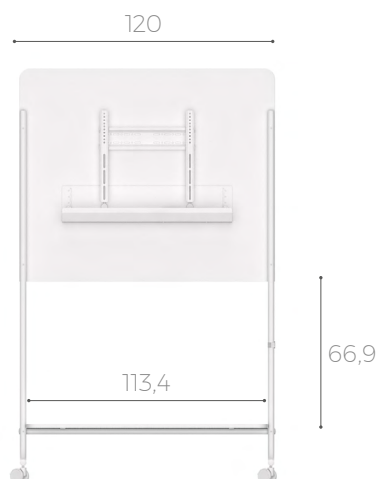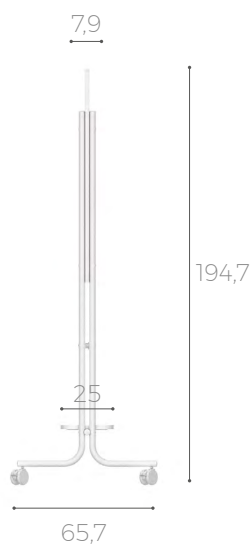

This unit is delivered **DISASSEMBLED**.

RECYCLABILITY and TOXIC MATERIALS

This furniture does not contain any toxic material and its components are recyclable.



For more information, please contact export department.