

# mobel sit

by mobel linea

Nice to sit you

## click

MEETING  
SOCIAL



Click social



Click wait



Click meet



Click meet



Click meet

### SPECS GUIDE



Seat and  
Backrest



Structures



Accessories



Documentation  
and Certificates



Ecodeign



## SEAT and BACKREST:




5 mm polypropylene seat and backrest.

Seat and backrest are fixed together with 2 cold-rolled steel oval tubes of 30 x 15 mm.

The backrest and the structure fit together and are secured with 2 screws.

The seat is fixed to the structure with 2 CL-89z Ø5, 1x20 screws.

## FINISHES:



White



Black



Brown



Red



Blue



## OPTIONAL:

Upholstered seat with polyurethane flexible-foam of  $\pm 30 \text{ Kg/m}^3$  density (3 cm thickness).

All the fabrics of the fabric folder are available.




#### 4 LEGS FRAME:




Four legs frame of cold-rolled oval steel tube of 30 x 15 mm and 1,5 mm thickness.

Under the seat, the structure is reinforced with 2 welded round tubes of cold-rolled steel of Ø18 mm.

#### FINISHES:



Black



White



Brown



Chrome

Black polypropylene glides to protect chair and floor from scratching. They also help in correct stacking adaptation.



Stackable up to 12 chairs.



Maximum load capacity: **110 Kg.**


## 4 LEGS FRAME WITH ARMS:



Four legs with arms frame of cold-rolled oval steel tube of 30 x 15 mm and 1,5 mm thickness.

Under the seat, the structure is reinforced with 2 welded round tubes of cold-rolled steel of Ø18 mm.

### FINISHES:



Black

Black polypropylene glides to protect chair and floor from scratching. They also help in correct stacking adaptation.



Stackable up to 12 chairs.



Maximum load capacity: **110 Kg.**


#### 4 LEGS FRAME WITH ARMS and WRITING-TABLET:



Four legs with arms frame of cold-rolled oval steel tube of 30 x 15 mm and 1,5 mm thickness.

Under the seat, the structure is reinforced with 2 welded round tubes of cold-rolled steel of Ø18 mm.

##### FINISH:




Black



**Foldable antipanic writing tablet:** black polypropylene..

The writing tablet is attached to the chair's structure with a welded square steel tube of 15x15 mm and a black polypropylene swivel joint system.

**Right hand.**



Antipanic movement

Black polypropylene glides to protect chair and floor from scratching.



It is not stackable.



Maximum load capacity: **110 Kg.**


## 4 LEGS FRAME WITH ARMS and REINFORCED WRITING-TABLET:



Four legs with arms frame of cold-rolled oval steel tube of 30 x 15 mm and 1,5 mm thickness.

Under the seat, the structure is reinforced with 2 welded round tubes of cold-rolled steel of Ø18 mm.

### FINISH:



Black




**Melamine foldable writing tablet:** 19 mm of thickness. Recoated chipboard with melamine of 120 grs/m<sup>2</sup> in both faces with a density of 600 Kg/m<sup>3</sup> ± 5 %.

ABS edges all around the top with a bevel of 2 mm.

The writing tablet is fixed to the chair's structure using a welded trapezoidal steel plate and a system of rotating hinges.

**Right and left hand.**

### FINISHES:

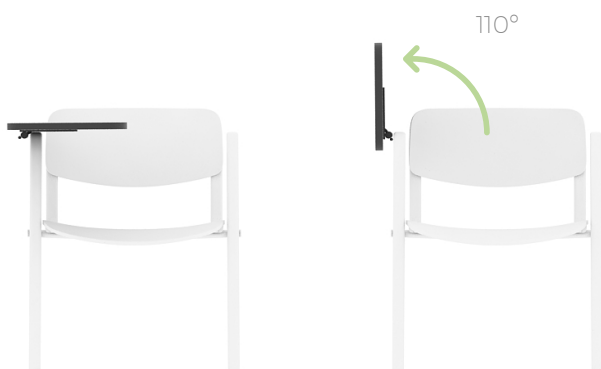

Black polypropylene glides to protect chair and floor from scratching. They also help in correct stacking adaptation.



Stackable up to 4 chairs.



Maximum load capacity: **110 Kg.**

## BEAM:



Black frame for the single-shell, made of cold-rolled steel tubes with a diameter of Ø25 mm and a thickness of 1,5 mm

Reinforced with cold-rolled oval steel tube of 40x20x1.5 mm.



The chair is attached to the beam-bar using a black U-shaped clamp with a thickness of 4 mm.

The black beam-bar is made of rectangular cold-rolled steel tube of 80x40x2mm.

### OPTION 1:

**T-shaped side:** can be fixed on the floor.

Black polished aluminum.

It is fixed to the beam-bar with an connector.

The beam-bar has two black decorative end-caps at both ends.



### OPTION 2:

**V-shaped side:**

Black nylon.

It is directly attached to the beam-bar.



### OPTION 3:

**Y-shaped side:**

Polished aluminum.

It is fixed to the beam-bar with an connector.

The beam-bar has two black decorative end-caps at both ends.

Black polyethylene glides Ø55 mm to protect side and floor from scratching.



### OPTIONAL:

T-shape arm made of black aluminum with black polypropylene armrest-pad.

It is directly attached to the beam-bar and can be placed at the ends of the beam or between chairs.



## TOP FOR BEAM:


**Melamine top:** 19 mm of thickness. Recoated chipboard with melamine of 120 grs/m<sup>2</sup> in both faces with a density of 600 Kg/m<sup>3</sup> ± 5 %.

ABS edges all around the top with a bevel of 2 mm.

Edges are fixed with melted glue and rounded in shape.

5 cm round corners.


## FINISHES:

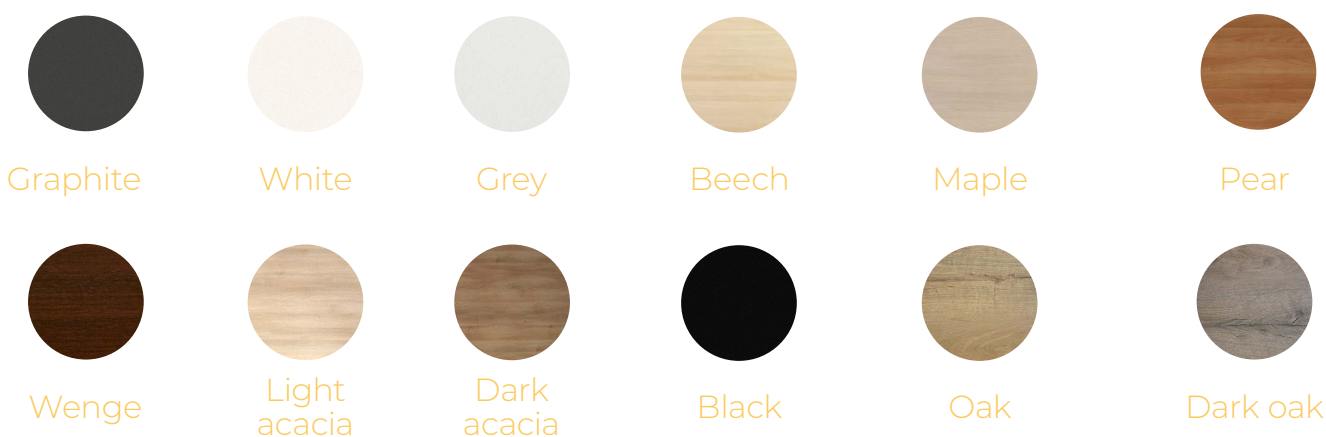

The top is assembled to the beam-bar using a U-shaped clamp with a thickness of 3mm.

The top has 4 anchor points for assembling the clamp.

## MEASUREMENTS (cm)

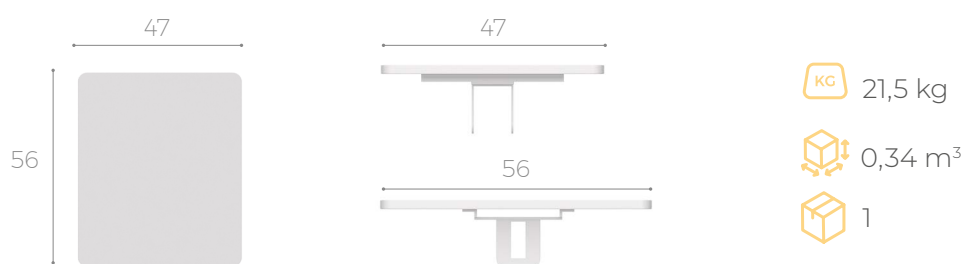




## ACCESSORIES:

### CHAIR TROLLEY:

Structure made of cold-rolled round steel tube of Ø25 mm and a thickness of 1.5 mm.

The base has two steel plates (640x150x3 mm) welded to support the chairs.

- Finish: black.
- 4 soft black and grey casters (2 with brakes) of Ø70 mm.

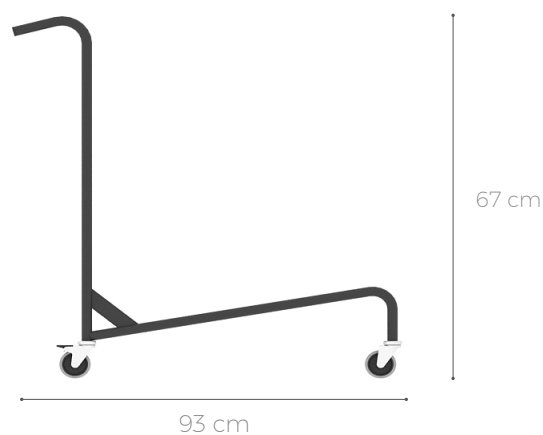

Maximum load capacity: **500 Kg.**

---

## CERTIFICATES



UNE-EN 16139:2013

---

## CARE INSTRUCTIONS



Clean the chair and its components with a soft cloth and neutral detergent.

## MEASUREMENTS (cm)



**KG** 4,83 kg

**m³** 0,0960 m<sup>3</sup>

**1**




**KG** 5,12 kg

**m³** 0,1160 m<sup>3</sup>

**1**



Writing tablet




**KG** 5,12 kg

**m³** 0,1160 m<sup>3</sup>

**1**



Writing tablet




**KG** 5,12 kg

**m³** 0,1160 m<sup>3</sup>

**1**


## MEASUREMENTS (cm)

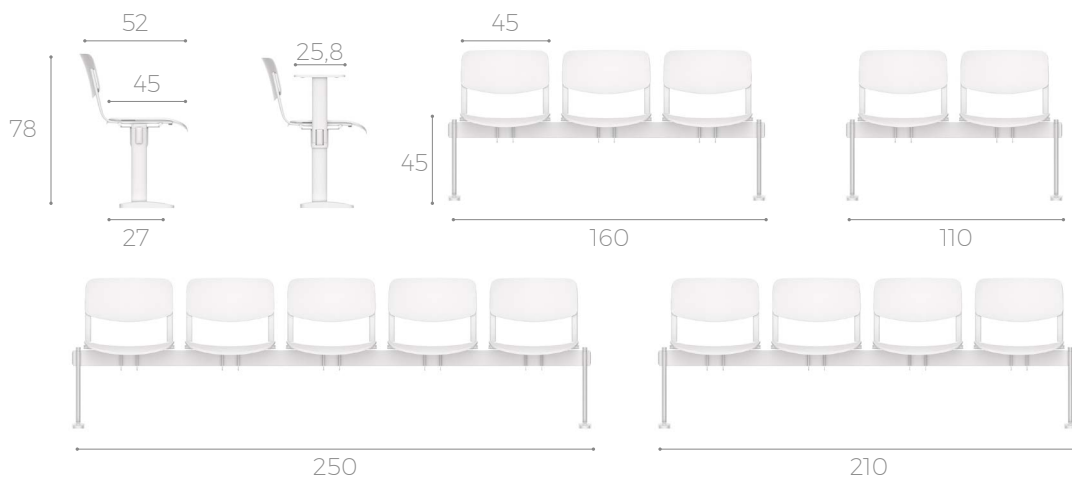

**KG** 17,24 - 37,74 kg

**m³** 0,2433 - 0,4491 m<sup>3</sup>


**1**

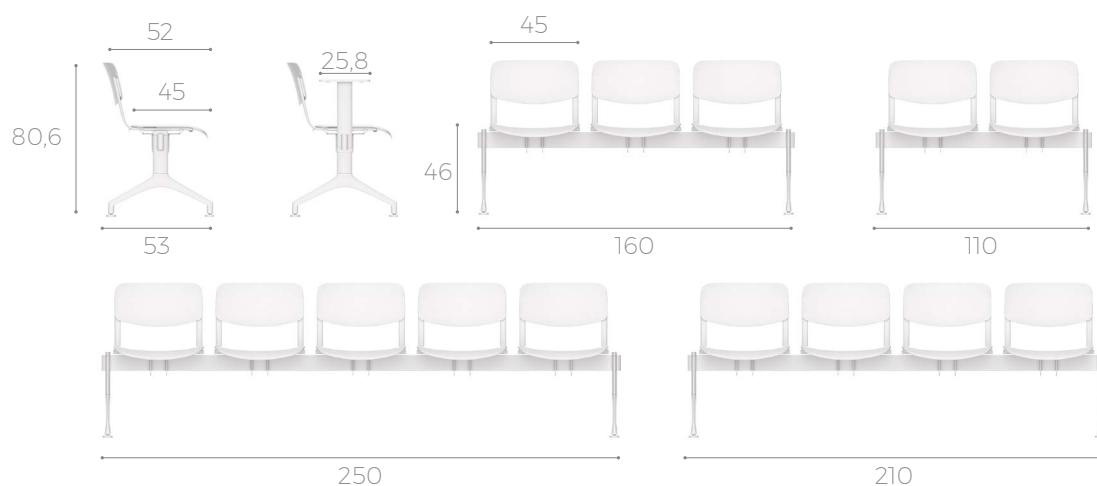

**KG** 17,24 - 37,74 kg

**m³** 0,2433 - 0,4491 m<sup>3</sup>

**1**

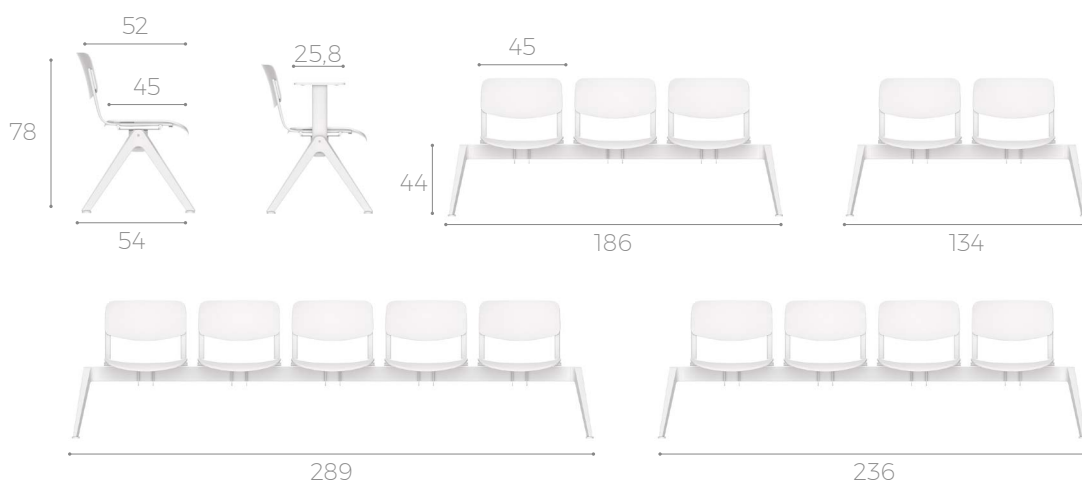

**KG** 17,24 - 37,74 kg

**m³** 0,2433 - 0,4491 m<sup>3</sup>

**1**

## VERSIONS



VERSIONS



---

## RECYCLABILITY and TOXIC MATERIALS

This chair does not contain any toxic material and its components are recyclable.



For more information, please contact export department