

mobel sit

by mobel linea

Nice to sit you

kook

SOCIAL

SPECS GUIDE



Seat



Structure



Documentation
and Certificates



Ecodesign



SEAT:



Plywood seat with a thickness of 12,5 mm

It is fixed to the metal structure with 4 screws DIN 7380 M6X20.

FINISH:




Maple



7 mm polypropylene seat.

It is fixed to the metal structure with 4 screws DIN 7981-c 6,3x22.

FINISHES:



White




Black



Maximum load capacity: **125 Kg.**

FRAME:



Four legs frame of rectangular cold-rolled steel tube of 30 x 15 mm and 1,5 mm thickness.




H-shaped footrest made of 2 cold-rolled rectangular steel tubes 30 x 10 x 2 mm and a welded square tube of 22 x 22 mm.

It is fixed to the structure with 8 screws DIN 7991 M5X12

Polyamide black or white glides that protect the stool and floor from scratching.

FINISHES:



White



Black



Raw gray

CERTIFICATES




UNE-EN 16139:2013

CARE INSTRUCTIONS




Clean the chair and its components with a soft cloth and neutral detergent.

MEASUREMENTS (cm)

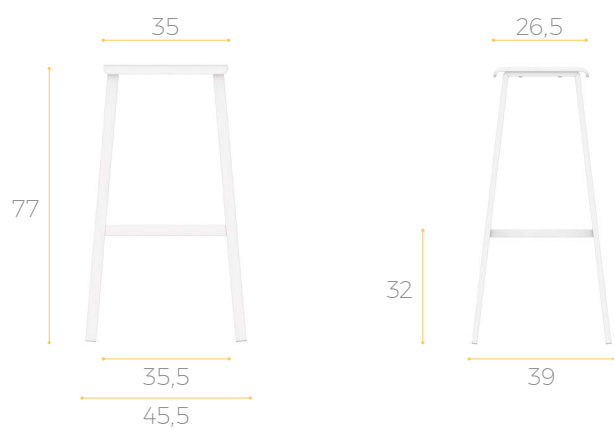

 5,13 kg

 0,1490 m³

 1

VERSIONS



RECYCLABILITY and TOXIC MATERIALS

This chair does not contain any toxic material and its components are recyclable.



For more information, please contact export department