

mobel sit

by mobel linea

Nice to sit you

plan

MEETING
GUEST



Plan meet



Plan meet



Plan guest



Plan guest

SPECS GUIDE



Seat and
Backrest



Structures



Documentation
and Certificates



Ecodeign



BACKREST:



7 mm black polypropylene backrest with fiberglass for a better roughness..
It is joined to the chair structure with a co-injected steel insert and two 5x13 screws..



The backrest has a **tilting movement** that is achieved through a hidden mechanism made with a compression spring and auto-return.
The tilt value for the backrest is 8°.

SEAT:



5 mm black polypropylene seat with fiberglass for a better roughness..
The seat is fixed to the structure by pressure.
Black polypropylene **outer seat cover** that conceals the mechanism of movements.



Sliding seat with a horizontal movement (front-back) with a 35 mm stroke.

FINISH:



Black



OPTIONAL:

Upholstered seat with polyurethane flexible-foam of $\pm 60 \text{ Kg/m}^3$ density (2 cm thickness).

All the fabrics of the fabric folder are available except EVOLVE.



4 LEGS FRAME:



Four legs frame of cold-rolled round steel tube of Ø22 mm and 2 mm thickness.

The structure is fixed to the backrest with a black polypropylene + fiberglass connector and a metal insert.

FINISHES:



Black



Chrome


4 LEGS FRAME WITH ARMS:



Four legs frame with arms of cold-rolled round steel tube of Ø22 mm and 2 mm thickness.

Black of polypropylene + fiberglass arms that connect the structure and the backrest using a metal insert.

FINISHES:



Black



Chrome

Black polypropylene glides to protect chair and floor from scratching.



Stackable up to 4 chairs.



Maximum load capacity: **125 Kg.**


CANTILEVER FRAME:



Cantilever frame of cold-rolled round steel tube of Ø25 mm and 2,5 mm thickness.

The structure is fixed to the backrest with a black polypropylene + fiberglass connector and a metal insert.

FINISHES:



Black



Chrome


CANTILEVER FRAME WITH ARMS:



Cantilever frame with arms of cold-rolled round steel tube of Ø25 mm and 2,5 mm thickness.

Black of polypropylene + fiberglass arms that connect the structure and the backrest using a metal insert and 4 screws.

FINISHES:



Black



Chrome

Translucent PVC glides to protect chair and floor from scratching.



Stackable up to 4 chairs.



Maximum load capacity: **125 Kg.**

CERTIFICATES



UNE-EN 16139:2013

CARE INSTRUCTIONS




Clean the chair and its components with a soft cloth and neutral detergent.


MEASUREMENTS (cm)




KG 8,55 kg 0,1850 m³ 1

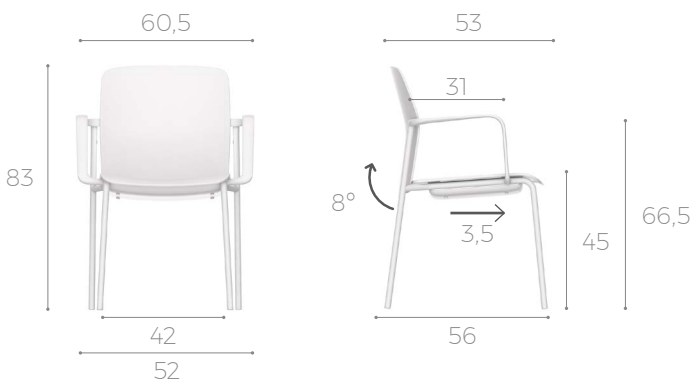

KG 8,85 kg 0,1850 m³ 1

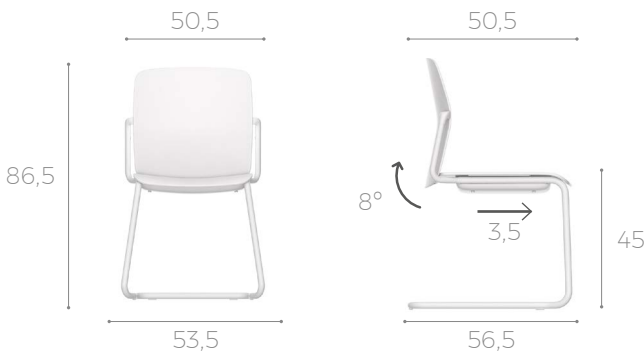

KG 10,15 kg 0,1850 m³ 1

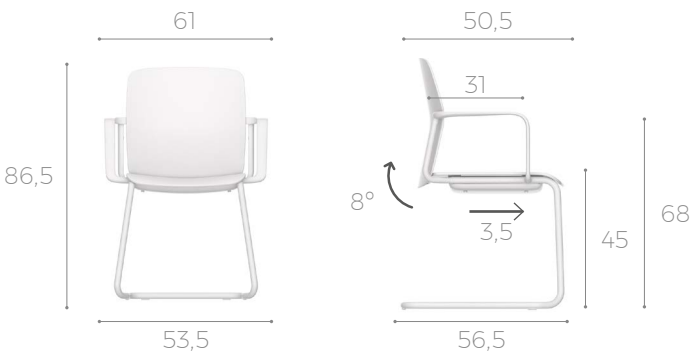

KG 10,45 kg 0,1850 m³ 1

VERSIONS



RECYCLABILITY and TOXIC MATERIALS

This chair does not contain any toxic material and its components are recyclable.



For more information, please contact export department